

## 7'x16' Rock Solid Cargo Enclosed Cargo



**\$9,559**

**Stock #:** 10676

**VIN:** 7H2BE1622TD068231

**Category:** Enclosed Cargo

**Cond.:** New

**Year:** 2026

**Make:** Rock Solid Cargo

**Model:** 7 X 16 TA

**Color:** Charcoal Gray

**Width:** 7' **Length:** 16'

**GVWR:** 7K

**ADDITIONAL DETAILS:** Height: 6' 3", Weight: 2,260, Axles: 2, Pull Type: Bumper, Construction: Steel, Features: .080 Exterior Siding, 2 Way Aluminum Side Wall Vent, ATP Front and Rear Corners, BLACK OUT PKG, Semi Screwless - Seams Only


### 7'x16' Rock Solid Cargo 7 X 16 TA Enclosed Cargo

This trailer features a sleek and durable exterior with .080 exterior siding, providing a smooth finish with semi-screwless seams for a clean look. The ATP front and rear corners and headers add extra protection and a polished appearance. Enhanced ventilation is provided by 2-way aluminum sidewall vents, ensuring optimal airflow.

Features a striking Black Out Package, highlighted by all black trim and sleek black ATP fenders. It boasts a black stone guard and V-nose for a unified aesthetic, complemented by black ATP stepwells on 8.5' wide models. The look is completed with black barlocks, aluminum wheels with black inlay, and black aluminum side vents, creating a bold and cohesive appearance.

This heavy-duty enclosed trailer is built with a robust 6" steel tube main frame and features 16" on-center spacing for its roof bows, floor cross members, and sidewalls, ensuring superior structural integrity. It boasts a durable 5/8" plywood floor and 3/8" plywood walls, complemented by a Therma Cool ceiling liner for climate management. Access is convenient through a 36" side door with a flush lock, illuminated by a 12-volt LED dome light. It rides smoothly on 3500 lbs. drop leaf spring axles equipped with electric brakes on both axles and E-Z Lube hubs with aluminum fenders. Additional features include a 2 5/16" coupler, 24" stone guard, a streamlined V-nose design, and full LED lighting. Inside, 4 floor mount D-rings help secure your cargo, and it connects easily with a 7-way Bargman plug.

#10676 Continued ...

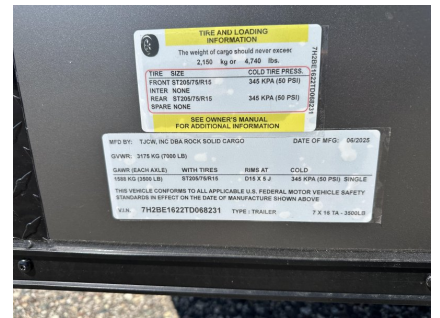

TIRE AND LOADING INFORMATION			
The weight of cargo should never exceed: 2,500 kg or 4,740 lbs.			
TIRE SIZE	COLD TIRE PRESS.		
FRONT: ST205/7R15	345 KPA (50 PSI)		
INTER: NONE	345 KPA (50 PSI)		
REAR: ST205/7R15	345 KPA (50 PSI)		
SPARE: NONE			
SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION			
MFG BY: 5W, INC DBA ROCK SOLID CARGO		DATE OF MFG: 06/2022	
GVWR: 3175 KG (7000 LBS)			
GVWR (EACH AXLE)	WITH TIRES	RWS AT	COLD
1588 KG (3500 LBS)	ST205/7R15	D15 X 2	345 KPA (50 PSI) SINGLE
THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE			
VIN: 7H2BE192TD06221	TYPE: TRAILER	T X 16 TA - 3800L	